



- Notes:
1. Sidewalk placement per Typical Section for Rural Streets, [See Detail 40-001].
  2. Sidewalk must be the same thickness of the driveway (6" or 8") through the first full segment of sidewalk.

PLAN VIEW

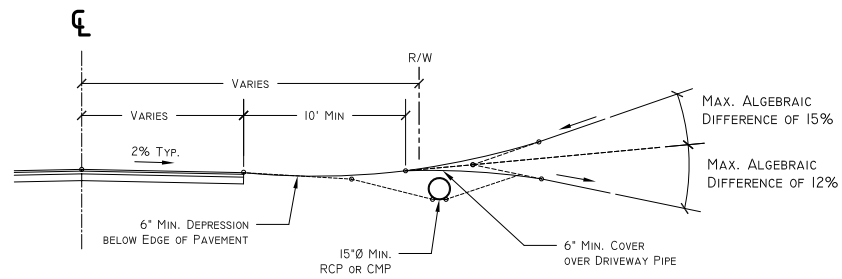

PROFILE

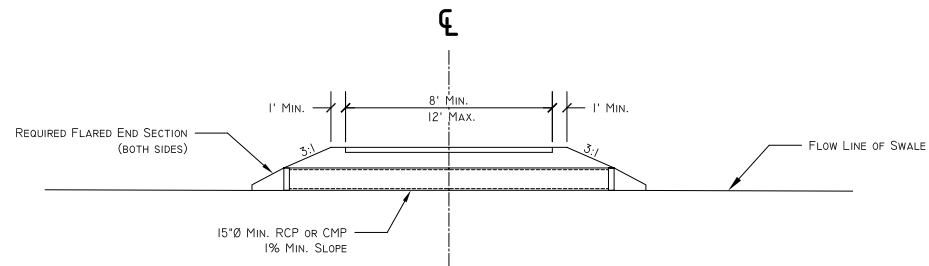

CROSS-SECTION